


ADP 122 functional block spare parts

Presentation of ADP components



IP support components, P, H models.....	F 90
IP support components, L model	F 91
IP1, IP2, LP3 stage components	F 100
Intermediate flange components	F 110
HP4, HP5 stage components	F 120
Cooling plate components	F 130
HP support components	F 140
Gearbox casing and motorization components.....	F 150

LP support components P, H models

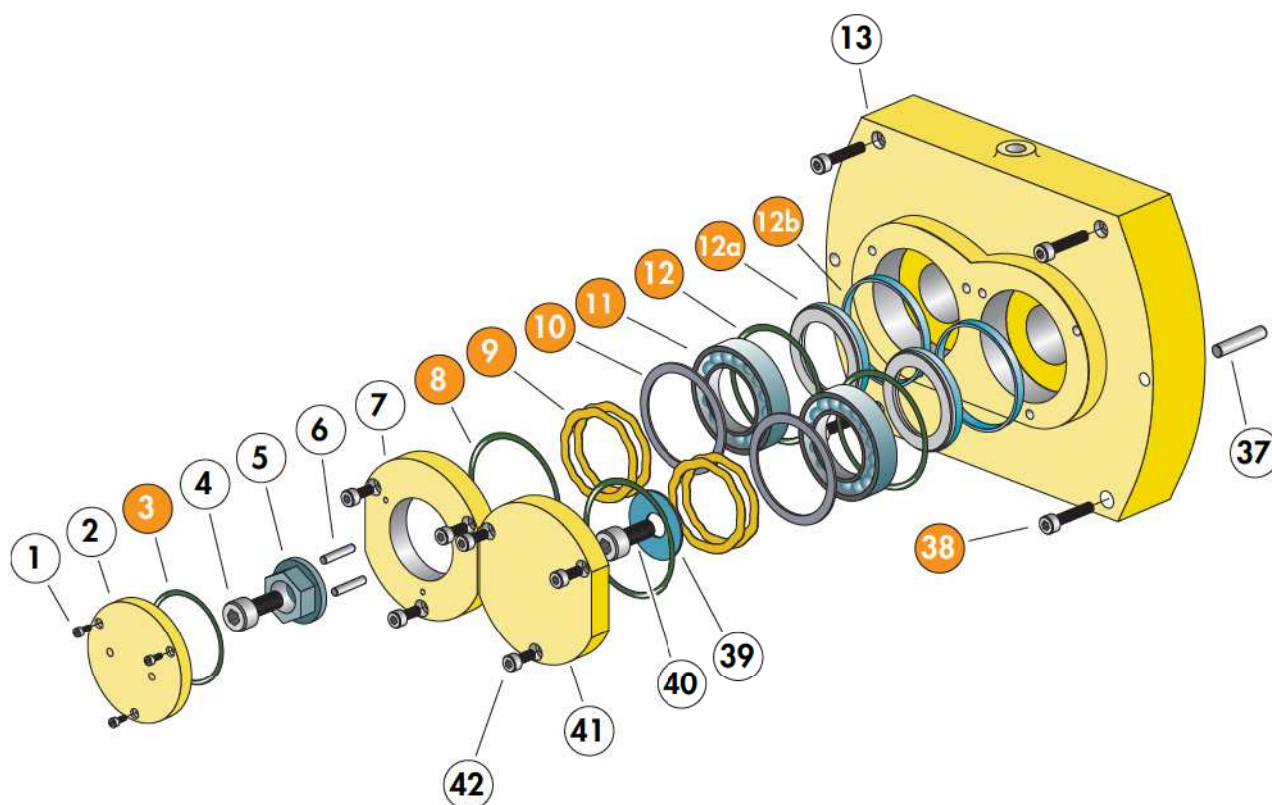


Rep.	Description	Qty*	P/N
1	Screw CHc M 4 x 10	3/3	084093
2	End cap	1/1	A329785
3	O-Ring 2 x ø 35	1/1	Seals Kit
4	Screw CHc M 8 x 17	1/2	061941
5	Driving nut	1/1	051928
6	Needle ø 4 x 15.8	2/3	071052
7	LP bearing cover	1/1	102916
8	O-Ring 2.5 x ø 52	2/2	Seals Kit
9	Borrelly washer	4/4	Maint. Kit
10	Washer	2/2	Maint. Kit
11	Ball bearing	2/2	Maint. Kit

Rep.	Description	Qty*	P/N
12	O-Ring 2.5 x ø 45	2/2	Seals Kit
12a	Lip seal	2/2	Maint. Kit
12b	Friction ring	2/2	Maint. Kit
13	LP support	1/1	105148
37	Centering Pin ø 8 x 30	2/10	060267
38	Screw CHc M 6 x 20	4/40	050149
39	Washer	1/1	060242
40	Idem 4	1/2	
41	LP bearing cover	1/1	102915
42	Screw CHc M 6 x 16 (12-9)	6/6	115691

* Quantity / Total Quantity

LP support components L model

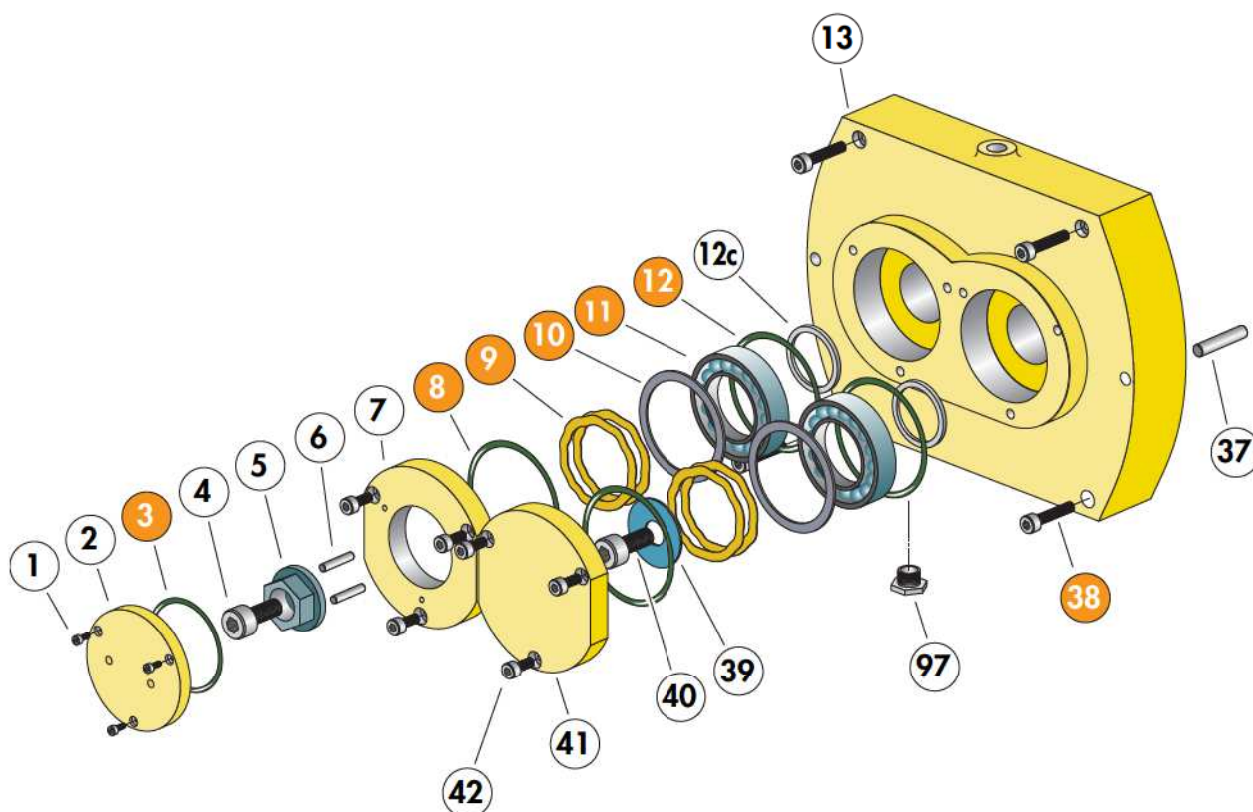


Rep.	Description	Qty*	P/N
1	Screw CHc M 4 x 10	3/3	084093
2	End cap	1/1	A329785
3	O-Ring 2 x ø 35	1/1	Seals Kit
4	Screw CHc M 8 x 17 (12-9)	1/2	061941
5	Driving nut	1/1	051928
6	Needle ø 4 x 15.8	2/3	071052
7	LP Bearing cover	1/1	102916
8	O-Ring 2.5 x ø 52	2/2	Seals Kit
9	Borrelly washer	4/4	Maint. Kit
10	Washer	2/2	Maint. Kit
11	Ball bearing	2/2	Maint. Kit

Rep.	Description	Qty*	P/N
12	O-Ring 2.5 x ø 45	2/2	Seals Kit
12c	Spacer	2/2	A461588
13	LP support	1/1	105148
37	Centering Pin ø 8 x 30	2/10	060267
38	Screw CHc M 6 x 20	4/40	050149
39	Washer	1/1	060242
40	Idem 4	1/2	
41	LP Bearing cover	1/1	102915
42	Screw CHc M 6 x16 (12-9)	6/6	115691
97	Male plug	1/5	082930

* Quantity / Total Quantity

LP1, LP2, LP3 stage components

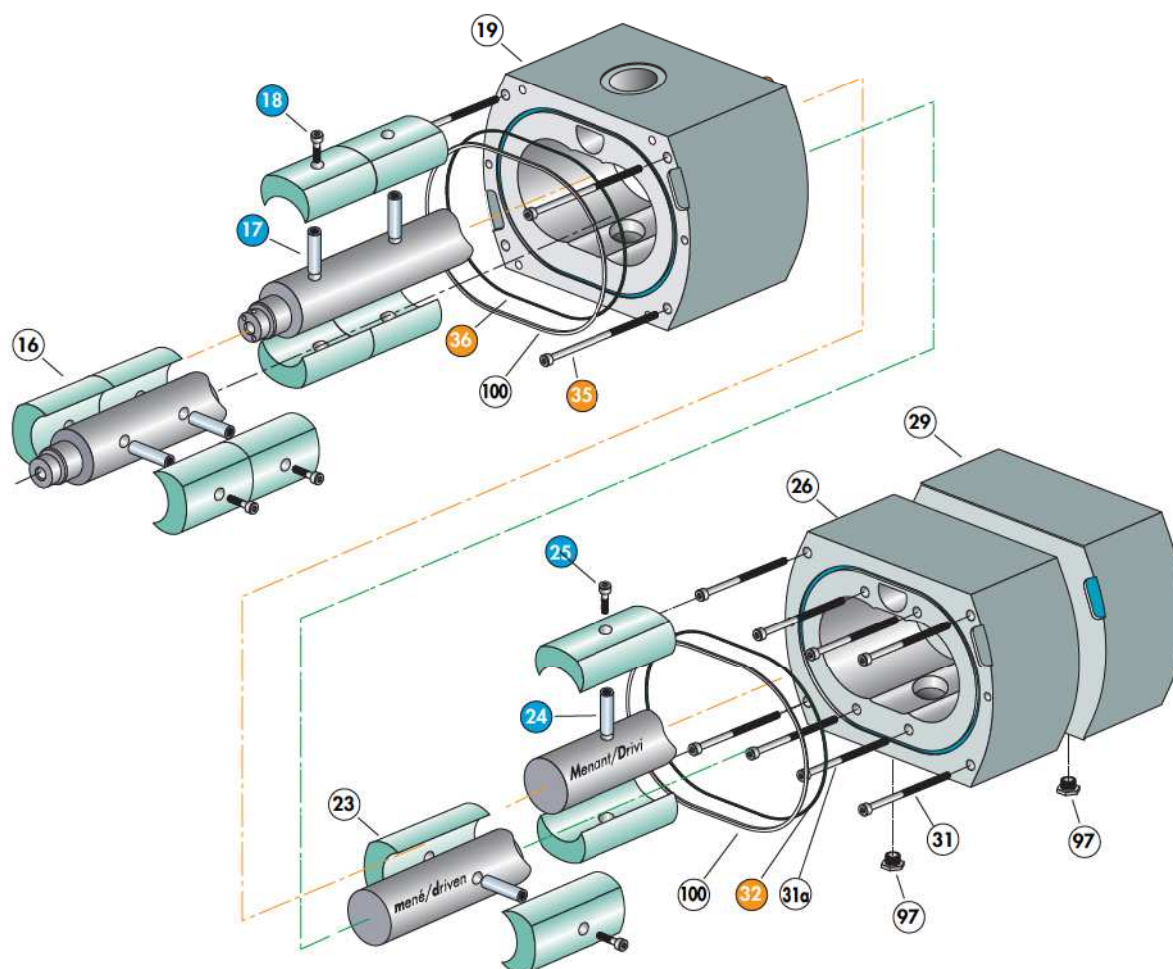


Rep.	Description	Qty*	P/N
16	LP1 lobe	2/8	A329691S
17	Threaded pin	4/12	105154
18	Screw CHc M 6 x 35	8/24	107054
19	Stator LP1	1/1	105891S
23	LP2 - LP3 lobe	8/8	A329690S
24	Idem 17	4/12	
25	Idem 18	8/24	
26	Stator LP2	1/1	A110930S

Rep.	Description	Qty*	P/N
29	Stator LP3	1/1	A110929S
31	Screw CHc M 6 x 80	8/16	074048
31a	Idem 31	8/16	
32	O-ring 3 x ø 211.82	2/11	Seals Kit
35	Screw CHc M 6 x 120 (BP1)	4/4	105898
36	Idem 32	1/11	
97	Male plug (L model)	2/5	082930
100	PTFE barrier (H model)	3/10	Barrier kit

* Quantity / Total Quantity

Intermediate flange components

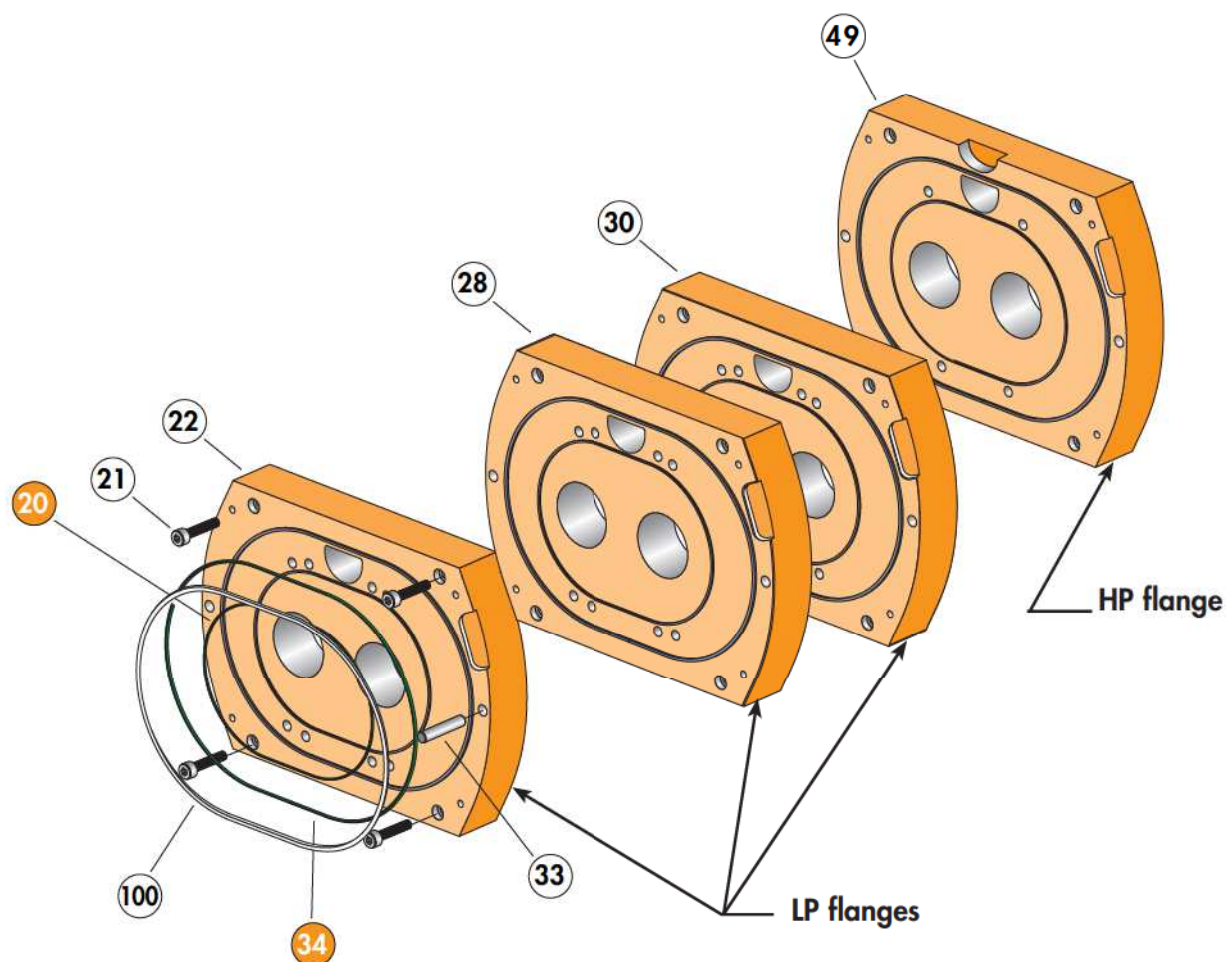


Rep.	Description	Qty*	P/N
20	O-Ring 3 x $\varnothing$ 145.55	4/6	Seals Kit
21	Screw CHc M 6 x 20 (12-9)	16/40	050149
22	LP flange	1/3	A110932S
28	Idem 22	1/3	
30	Idem 22	1/3	

Rep.	Description	Qty*	P/N
33	Centering Pin $\varnothing$ 8 x 30	8/10	060267
34	O-Ring 3 x $\varnothing$ 211.82	4/11	Seals Kit
49	HP flange	1/1	A110931S
100	PTFE barrier (H model)	4/10	Barrier kit

* Quantity / Total Quantity

HP4, HP5 stage components

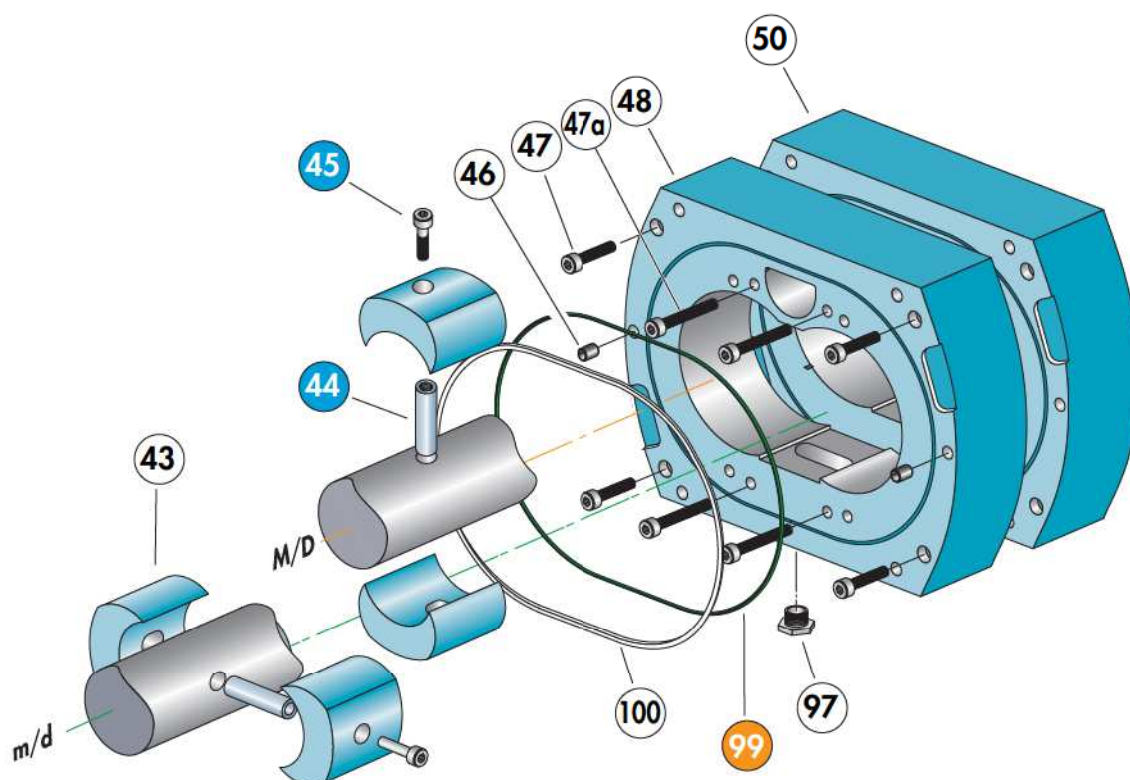


Rep.	Description	Qty*	P/N
43	HP lobe	8/8	105149S
44	Threaded pin	4/12	105154
45	Screw CHc M 6 x 35	8/24	107054
46	Specific spacer	4/6	060208
47	Screw CHc M 6 x 20 (12-9)	8/40	050149
47a	Screw CHc M 6 x 45 (HP4)	8/8	074047

Rep.	Description	Qty*	P/N
48	Stator HP4	1/1	A110927S
50	Stator HP5	1/1	A110925S
97	Male plug (L model)	1/5	A110931
99	O-Ring 3 x ø 211.82	2/11	Seals kit
100	PTFE barrier (H model)	2/10	Barrier kit

* Quantity / Total Quantity

Cooling plate components

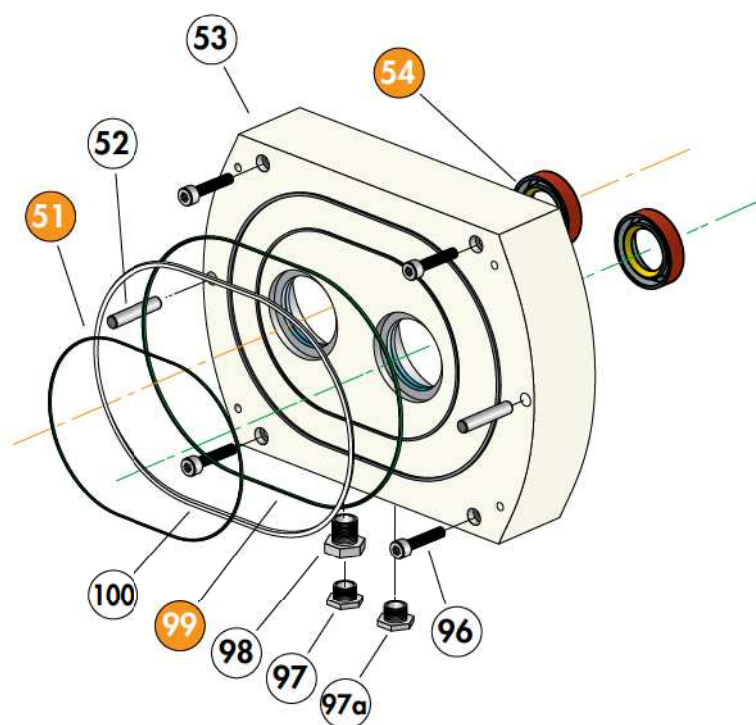


Rep.	Description	Qty*	P/N
51	O-Ring 3 x $\varnothing$ 145.55	1/6	Seals kit
52	Centering Pin $\varnothing$ 8 x 37	2/2	060268
53	Cooling plate	1/1	A111232S
54	Lip seal $\varnothing$ 52 x 38.5 x 8	2/2	Seals kit
96	Vis M 6 x 20 (12-9)	4/40	050149

Rep.	Description	Qty*	P/N
97	Male plug (L model)	1/5	082930
97a	Idem 97 (for old model)	1/5	
98	Male/female RED connector	1/1	081419
99	O-Ring 3 x $\varnothing$ 211.82	1/11	Seals kit
100	PTFE barrier (H model)	1/10	Barrier kit

* Quantity / Total Quantity

HP support components

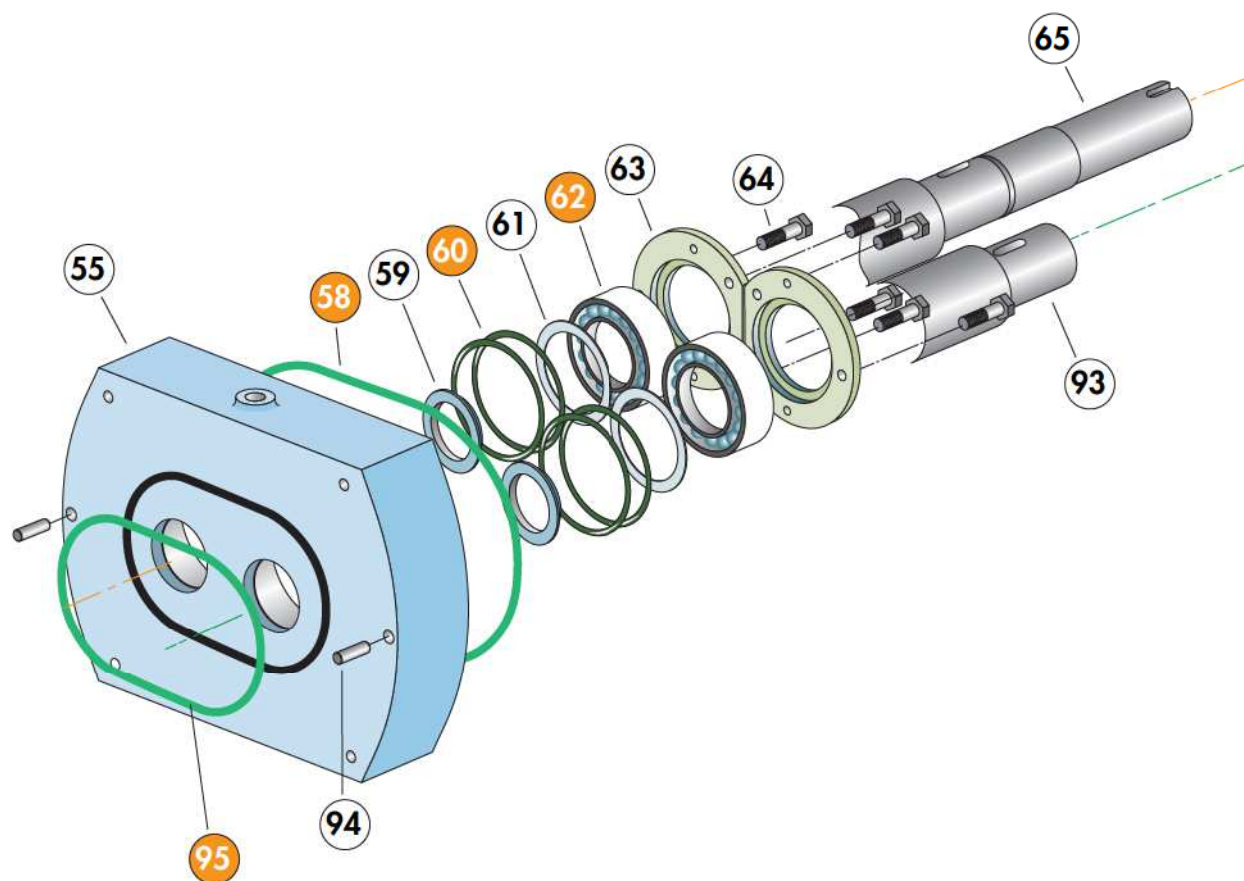


Rep.	Description	Qty*	P/N
55	HP support	1/1	105961S
58	O-Ring 3 x ø 211.82	1/11	Seals kit
59	Deflector	2/2	105158
60	O-Ring 2.5 x ø 60	4/4	Seals kit
61	HP ball bearing flange	2/2	106620
62	Ball bearings	2/2	Maint. kit
63	HP bearing clamping flange	2/2	105157

Rep.	Description	Qty*	P/N
64	Screw H.M 6 x 16	6/6	114859
65	Driving shaft (H model)	1/1	A111242S
93	Driven shaft (H model)	1/1	A111243S
94	Specific spacer	2/6	060208
95	O-Ring 3 x ø 145.55	1/6	Seals kit

* Quantity / Total Quantity

Gearbox casing and motorization components

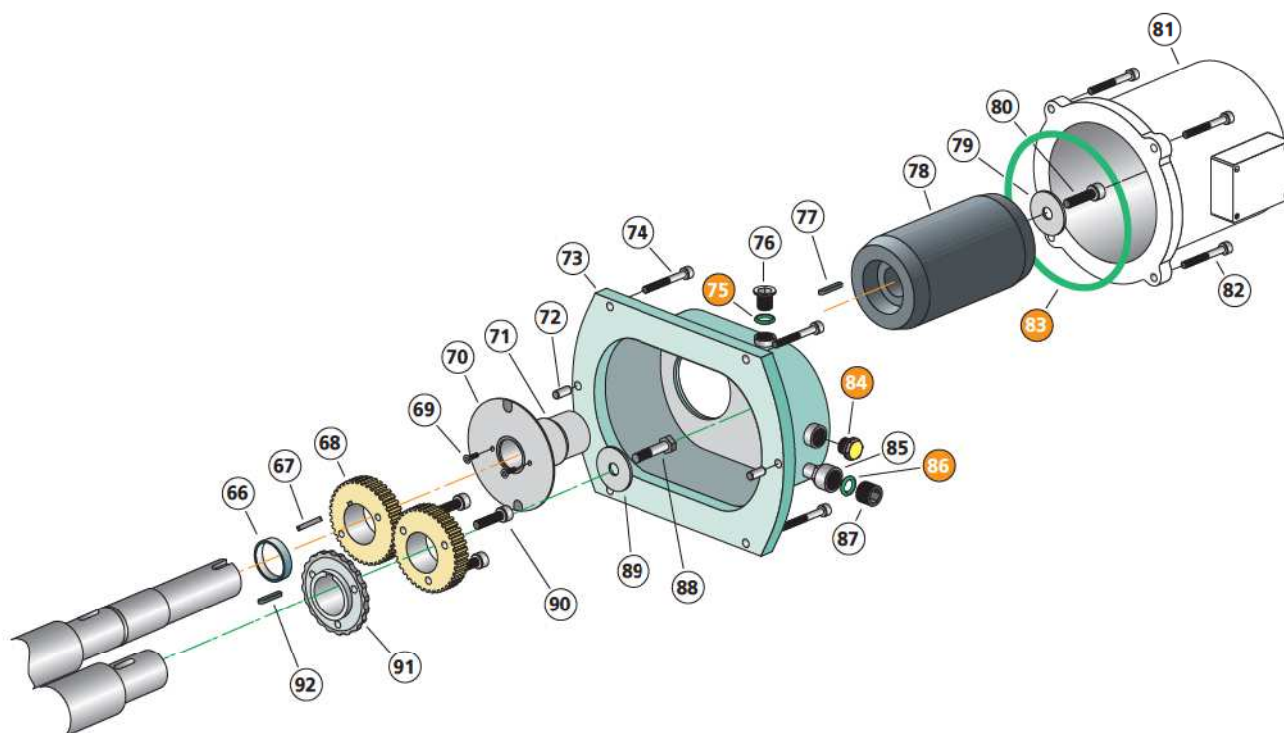

Rep.	Description	Qty*	P/N
66	Spacer	1/1	105159
67	Key	1/2	105160
68	Set of motering gears	1/1	105155
69	Screw FS M 3 x 5	2/2	084031
70	Lubrication plate	1/1	061951
71	Plate support sleeve	1/1	105162
72	Centering pin $\varnothing$ 8 x 12	2/2	071046
73	Gearbox casing	1/1	105151
74	Screw CHc M 6 x 20 (12-9)	8/40	050149
75	O-ring 2.7 x $\varnothing$ 18.4	1/2	Seals kit
76	Plug connector B 1/2	1/2	076791
77	Needle $\varnothing$ 4 x 15.8	1/3	071052
78	Motor-Rotor (incl. in 81)	1/1	
79	Clamping rotor washer	1/1	105156

Rep.	Description	Qty*	P/N
80	Screw CHc M 8 x 25 (12-9)	1/1	114860
81	Motor - Stator	1/1	1081175
82	Screw CHc M 8 x 25	4/4	082736
83	O-ring 3 x $\varnothing$ 154.5	1/1	Seals kit
84	Oil level indicator	1/1	Seals kit
85	Waste pipe	1/1	100046
86	Idem 75	1/2	
87	Idem 76	1/2	
88	Screw HM 8 x 25	1/1	115692
89	Clamping washer (gears)	1/1	105156
90	Left-hand thread screw M6 x 20	3/3	107083
91	Driving plate	1/1	105161
92	Idem 67	1/2	

* Quantity / Total Quantity